





SPECIFICATION

FT 390+

Description: Direct thermal non-top coated
Application: Well suited for FAX/POS, Receipt

<u>Physical Properties</u>		Unit	Specification	Test method
Substance		g/m ²	48.0 ± 5.0	ISO 536
Thickness		µm	53 ± 5	ISO 534
Smoothness		Sec	Min 100	Oken method
Brightness		%	Min 75	ISO 2470 (C/2°)
Tensile Strength	MD/CD	kN/m	Min 1.5 / Min 0.9	ISO 1924-2
Tearing Strength	MD/CD	mN	Min 150 / Min 150	ISO 1974
<u>Image Density</u>				
			Min 0.90	Atlantex 400 / Speed 4 inch/sec.
			Min 1.10	
<u>Durability</u>			Background / Image part	Test method
Heat Resistance			Max 0.20 / Min 1.00	60°C dry 24Hrs.
Moisture Resistance			Max 0.20 / Min 1.00	40°C 90%RH 24Hrs.
Light Resistance			Max 0.20 / Min 1.00	5000Lux 100Hrs.

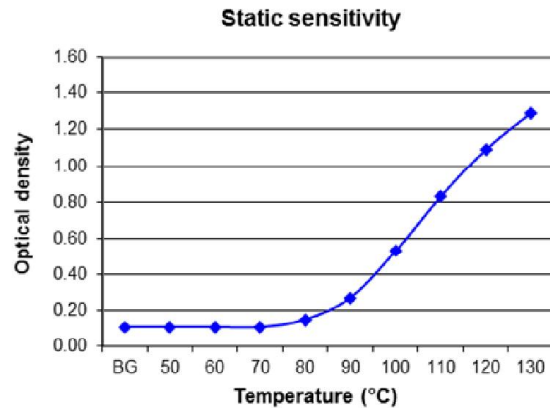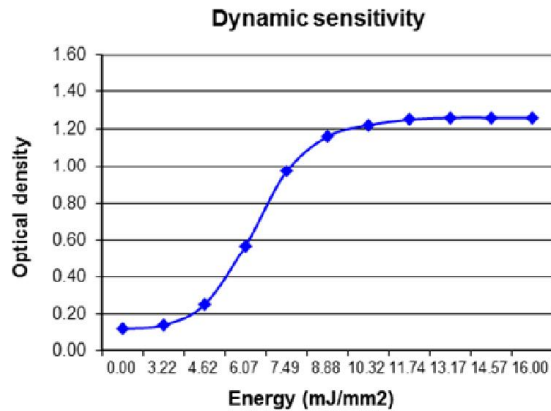

Storage Suggestion

Our thermal paper should be stored at a constant temperature of 23 ± 5 °C and a relative humidity of 50 ± 10%. Exposure to strong sunlight or strong artificial light or the influence of aggressive chemicals should be avoided.

Valid from June 2023